


Pleated Blinds Freehanging P1100 Fitting & Operating Instructions


Mount the clips 50 mm from the end of the headrail, and with a distance of max. 600 mm. No countersunk screws may be used for fixing.
Recommendation: DIN 7981 Ø3.8 x 16 mm
(for wooden and synthetic frames)

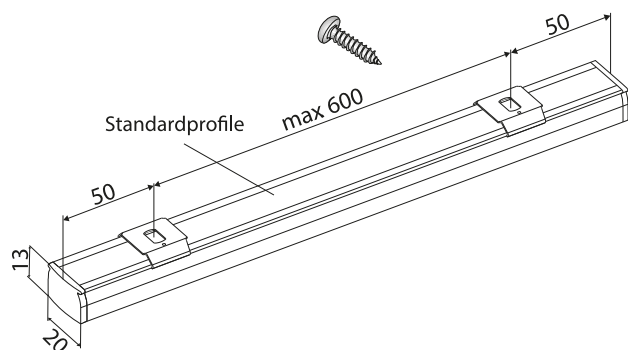


WARNING

According to EN 13120

- Young children can be strangled by loops in pull cords, chains, tapes and inner cords that operate the product. They can also wrap cords around their necks.
- To avoid strangulation and entanglement, keep cords out of reach of young children.
- Move beds, cots and furniture away from window covering cords.
- Do not tie cords together. Make sure cords do not twist and create a loop.
- Install and use the included safety devices according to the installation instructions on these devices to reduce possibility of such an accident.




Mounting: Place the profile in the back edge of the clip and push the front of the profile upwards (till it clicks in).

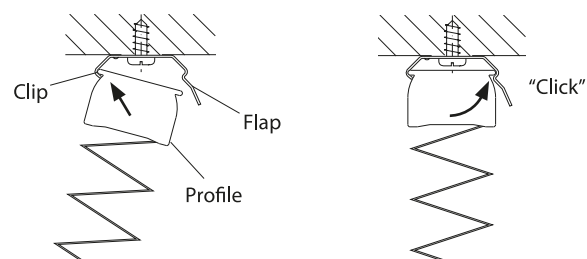


When **dismounting**, push the flap of the clip upwards to be able to take the profile out of the clip.

Mounting positions: In the case of a ceiling/wall mounting, make sure that the height of the fabric pack does not collide the tilted or opened wing of the window.


Ceiling mounting




Wall mounting



Face fix bracket standard



Face fix bracket, small sliding: 13-21 mm



Face fix bracket, large sliding: 60-108 mm



Synthetic nut



Face fixing bracket



Clip



DIN 7981
Ø3.5x6.5

Pleated Blinds

Freehanging P1100

Fitting & Operating Instructions

Care:

When cleaning glass and the window frame, make sure that no water or caustic cleaning agents come into contact with the pleated blind fabric.

No guarantee can be offered for damage to fabrics that is attributable to Condensation, cleaning agents or soiling by insects.

OPERATION

To open the hanging:

Pull the cord on the tassel downwards. When the tassel is released, the hanging stays in the desired position.

To close the hanging:

Pull the tassel to the middle of the hanging, guide it at an angle to the cord lock. The hanging closes.

Note to installer: Please ensure a general shield safety warning tag is fitted on the product. The Installation of this product can be completed by non-professionals.

Dear Customer,

This dimensionally accurate pleated blind was produced especially according to your requirements. High quality materials and a design that is perfect in function and elegance guarantee a long service lifetime and thus ensure great pleasure in the purchased product.

! Please read the following instructions carefully before installing the blind !

Modifications of the product may only take place according to agreement with the manufacturer.

No mounting screws for fixing is enclosed. Please ensure to use screws suitable for the window material and with sufficient strength.


CHILD SAFETY DEVICES



**CHILD SAFE
PRODUCT**

FITTING INSTRUCTIONS


CORD CLEAT - VH140

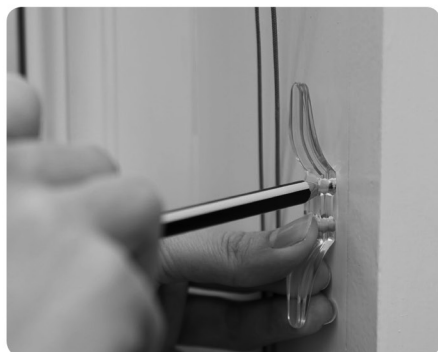

1. Position device as close to the headrail as possible and in all cases, no less than 1.5m from the floor in compliance with BS EN13120*. Mark hole positions on substrate.



2. Drill pilot holes and screw device into position. Use applicable wall plugs if required.

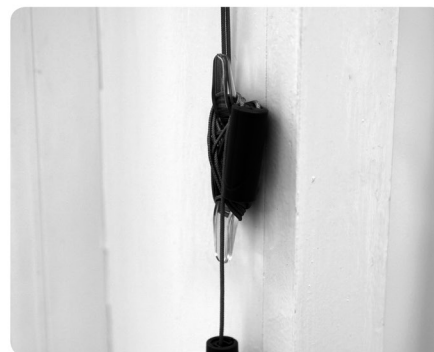

3. Ensure complete length of pull cords can be accumulated and maintained when the internal blind is in the fully retracted position.

** For a full overview of the requirements of BS EN13120, please refer to the relevant product Child Safety Guide.*

All the above components are tested to ensure compliance with the Child Safety requirements of BS EN13120. Using any alternative components would not be covered by our certification and require additional testing to ensure compliance. Make sure the required labels are left on the device & blind when installation is complete.