

THE BLIND SHOP

Information Sheet

Roller Blinds: Joining Brackets & Measuring


When you have two roller blinds side by side, they can be linked together using our joining brackets. The joining brackets reduce the gap between the blinds to provide better window coverage and a professional finish.

There are two types of joining brackets:

Linked - couples the blinds together so that only one of the blinds needs a control chain

Independent - each blind is controlled by its own chain control.

The diagrams below shows 2 blinds within a single window and how the joining brackets might be used.

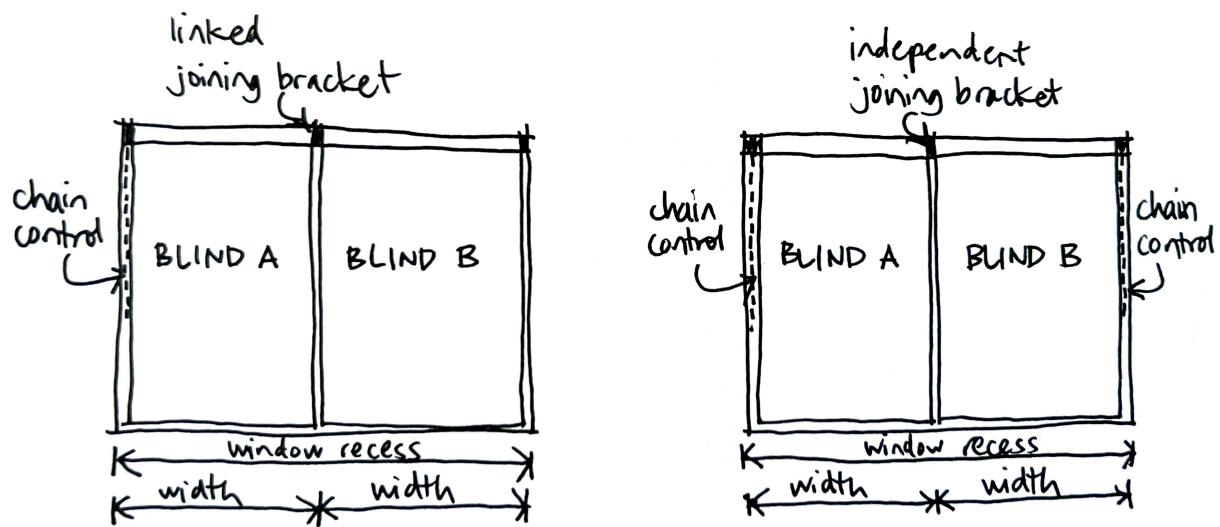

Blind A is operated by left side chain control. It has a 'linked' joining bracket which operates **Blind B**. Therefore, **Blind B** does not require a chain control.

Blind A is operated by left side chain control. It has an 'independent' joining bracket. **Blind B** is operated by right side chain control.

How to Measure

1. Measure the overall width of the window recess. This allows us to double check for potential errors.
2. Measure the width for each blind. Give these width measurements as 'inside recess' type.
Blind A - wall to centre point of Blind A & B
Blind B - wall to centre point of Blind A & B

If you are unsure, please email us a photo of your window and we can mark up exactly where to measure. If you have any questions, please just call us.

THEBLINDSHOP.COM

The Blind Shop Ltd, Unit 5 Lady Bee Studios, Riverside, Brighton, West Sussex BN42 4BY
01273 462196 info@theblindshop.com

Reg address: Maria House, 35 Millers Road, Brighton, East Sussex BN1 5NP Reg no. 5960311 VAT no. 896801771

